

LC520WU*
Liquid Crystal Display

Product Specification

SPECIFICATION FOR APPROVAL

(●) Preliminary Specification

() Final Specification

Title	52.0" WUXGA TFT LCD
-------	---------------------

BUYER	
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LC520WU1
SUFFIX	SLA1

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE	DATE
/		
/		
/		

Please return 1 copy for your confirmation with
your signature and comments.

APPROVED BY	SIGNATURE	DATE
J.H. Yoon / Senior Manager		
REVIEWED BY		
G.Y.Jung / Manager		
PREPARED BY		
B.Y.Kim / Engineer		

TV Product Development Dept.
LG. Philips LCD Co., Ltd

LC520WU*
Liquid Crystal Display

Product Specification

Contents

Number	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	6
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTIONS	8
3-3	SIGNAL TIMING SPECIFICATIONS	10
3-4	SIGNAL TIMING WAVEFORMS	12
3-5	COLOR INPUT DATA REFERENCE	13
3-6	POWER SEQUENCE	14
4	OPTICAL SPECIFICATIONS	16
5	MECHANICAL CHARACTERISTICS	20
6	RELIABILITY	23
7	INTERNATIONAL STANDARDS	24
7-1	SAFETY	24
7-2	EMC	24
8	PACKING	25
8-1	DESIGNATION OF LOT MARK	25
8-2	PACKING FORM	25
9	PRECAUTIONS	26
9-1	MOUNTING PRECAUTIONS	26
9-2	OPERATING PRECAUTIONS	26
9-3	ELECTROSTATIC DISCHARGE CONTROL	27
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	27
9-5	STORAGE	27
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	27



Product Specification

Record of Revisions

[illegible]




LC520WU*
Liquid Crystal Display

Product Specification

1. General Description

LC520WU* is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp(CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 52.04 inch diagonally measured active display area with WUXGA resolution (1080 vertical by 1920 horizontal pixel array) Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the luminance of the sub-pixel color is determined with a 8-bit or 10-bit gray scale signal for each dot, thus presenting a palette of more than 16.7M(true) or 1Billion(8bit+Dithering) of colors. It has been designed to apply the 8-bit 2 port or 10-bit 2 port LVDS interface. It is intended to support LCD TV, PCTV where high brightness, super wide viewing angle, high color gamut, high color depth and fast response time are important.

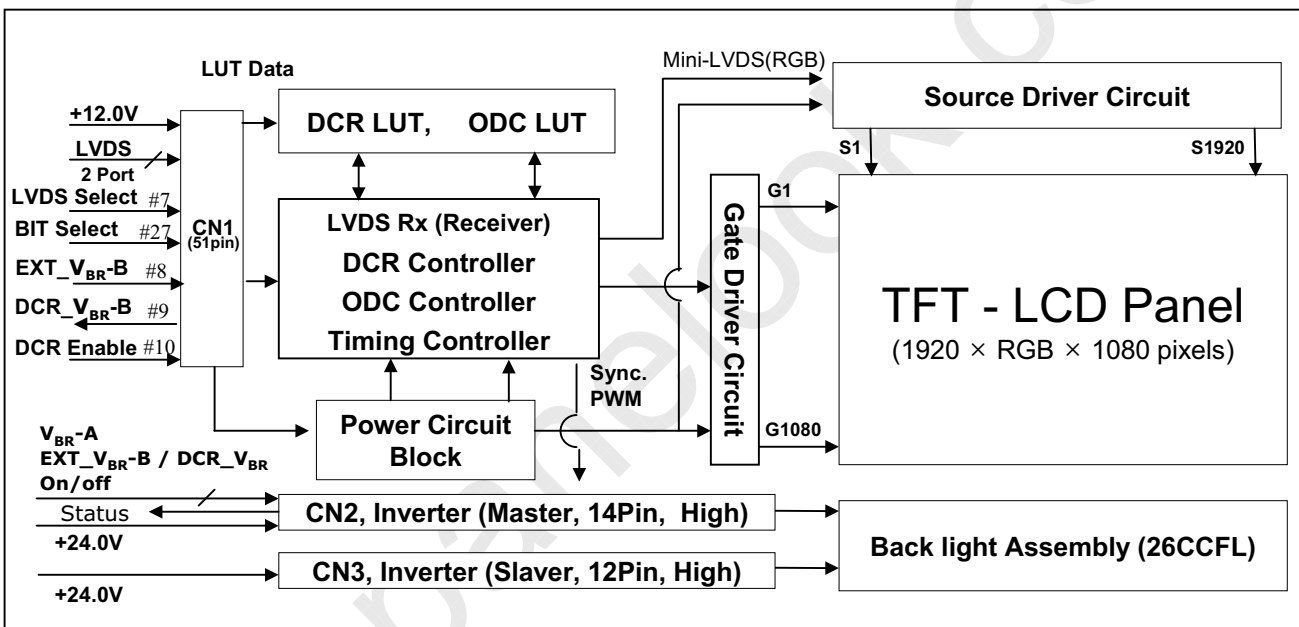

General Features

Active Screen Size	52.04 inches(1321,816mm) diagonal
Outline Dimension	1236.0mm X 719.2mm X 57.5mm(Typ)
Pixel Pitch	0.200mm x 0.600mm x RGB
Pixel Format	1920 horiz. by 1080 vert. pixels RGB stripe arrangement
Color Depth	8-bit, 16.7 M / 8-bit+dithering, 1Billion colors
Luminance, White	500 cd/m ² (Center 1 point Typ.)
Viewing Angle (CR>10)	Viewing angle free (R/L 178(Typ.), U/D 178(Typ.))
Power Consumption	Total TBD Watt (Typ.) (Logic= TBDW, Lamp= TBDW [I _{BL} =TBDmA])
Weight	TBD (Typ.)
Display Operating Mode	Transmissive mode, Normally black
Surface Treatment	Hard coating(2H), Anti-glare treatment of the front polarizer



LC520WU*
Liquid Crystal Display

Product Specification

2. Absolute Maximum Ratings

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit.


Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value		Unit	Remark
			Min	Max		
Power Input Voltage	LCM	V_{LCD}	-0.3	14.0	V_{DC}	at $25 \pm 2^\circ\text{C}$
	Backlight inverter	V_{BL}	21.6	27.0	V_{DC}	When operating
Option input voltage(select)		V_I	-0.3	3.6	V_{DC}	#7, #10, #27 Pin
ON/OFF Control Voltage		$V_{ON/OFF}$	-0.3	5.5	-	
Brightness Control Voltage		V_{BR_A} , V_{BR_B}	-0.3	5.0	V_{DC}	
Operating Temperature		T_{OP}	0	40	$^\circ\text{C}$	Note 1 Note 2
Storage Temperature		T_{ST}	-20	50	$^\circ\text{C}$	
Operating Ambient Humidity		H_{OP}	10	90	%RH	
Storage Humidity		H_{ST}	10	90	%RH	

Note : 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max. and no condensation of water.

2. Gravity mura can be guaranteed under 40°C condition.

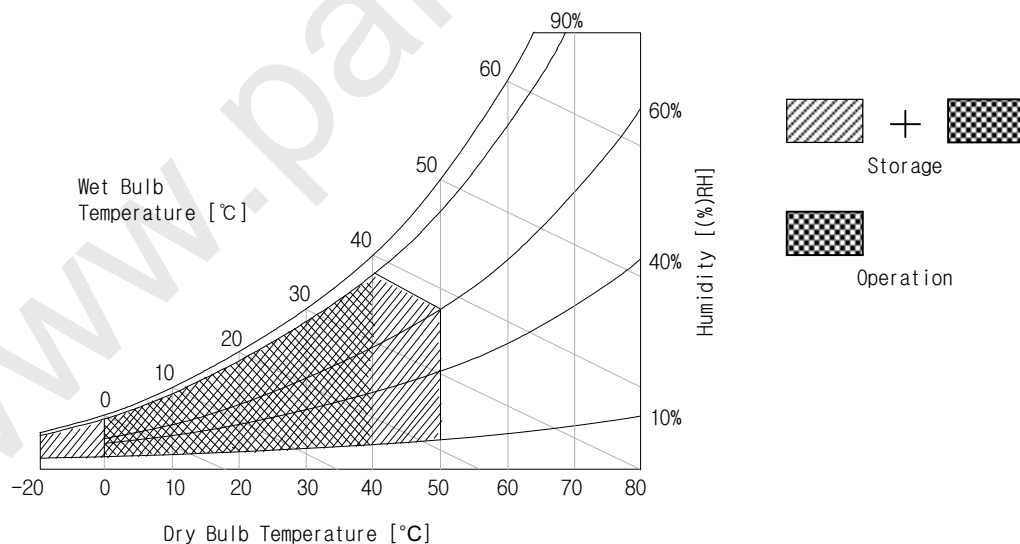



Product Specification

Record of Revisions

[illegible]



LC520WU*
Liquid Crystal Display

Product Specification

Table 2_2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Inverter :							
Input Voltage	V_{BL}		22.8	24.0	25.2	V_{DC}	
Input Current	I_{BL}	$V_{BR-A(max)} = 3.3V$	-	TBD	TBD	A	1
		$V_{BR-A(Typ)} = 1.65V$	-	TBD	TBD	A	1
Power Supply Input Current (In-Rush)	I_{RUSH}	$V_{BL}=22.8V$ $V_{BR-A}=1.65V$ $EXT_V_{BR-B}=3.3V$	-	-	TBD	A	
Power Consumption	P_{BL}	$V_{BR-A} = 1.65V$	-	TBD	TBD	Watt	1
B/L on/off control	$V_{ON/OFF}$	Lamp ON = High	2.5	-	5.25	V_{DC}	
		Lamp OFF =Low	0		0.8	V_{DC}	
Brightness Adj (Analog mode)	V_{BR-A}		0	1.65	3.3	V_{DC}	
Brightness Adj (Burst mode)	V_{BR-B}		0	-	3.3	V_{DC}	
Life Time			50,000			Hrs	2

Notes :

- Electrical characteristics are determined after the unit has been 'ON' and stable for approximately 120 minutes at $25 \pm 2^\circ C$.
The specified current and power consumption are under the typical supply condition (Input voltage 24V , V_{br-A} 1.65V and V_{br-B} 3.3V)
The ripple voltage of the power supply input voltage is under 0.5 Vp-p. LPL recommend Input Voltage is $4.0V \pm 5\%$.
- Specified values are for a single lamp which is aligned horizontally.
The life is determined as the time at which luminance of the lamp is 50% compared to that of initial value at the typical lamp current ($V_{BR-A} = 1.65V$) on condition of continuous operating at $25 \pm 2^\circ C$.
Specified value is when lamp is aligned horizontally.



LC520WU*
Liquid Crystal Display

Product Specification

3-2. Interface Connections

This LCD module employs two kinds of interface connection, a 51-pin connector is used for the module electronics , 14-pin and 12-pin connectors are used for the integral backlight system.

3-2-1. LCD Module

- LCD Connector(CN1): FI-RE51S-HF or Equivalent
- Mating Connector : FI-RE51HL or Equivalent

Table 3. MODULE CONNECTOR(CN1) PIN CONFIGURATION


No	Symbol	Description	No	Symbol	Description
1	GND	Ground	27	BIT Select	Logic 'L' : 8bit, 'H' or 'NC' : 10bit
2	NC	Reserved	28	RE0N	SECOND CHANNEL 0-
3	NC	Reserved	29	RE0P	SECOND CHANNEL 0+
4	NC	(I2C DATA Interface)	30	RE1N	SECOND CHANNEL 1-
5	NC	(I2C CLK Interface)	31	RE1P	SECOND CHANNEL 1+
6	NC	(EEPROM Write Protection)	32	RE2N	SECOND CHANNEL 2-
7	LVDS Select	Logic 'L' or 'NC': LG , 'H' : DISM	33	RE2P	SECOND CHANNEL 2+
8	EXT_V _{BR} -B	EXT_V _{BR} -B Input	34	GND	Ground
9	DCR_V _{BR} -B	DCR_V _{BR} -B Output	35	RECLKN	SECOND CLOCK CHANNEL C-
10	DCR Enable	Logic 'L' Level : Disable	36	RECLKP	SECOND CLOCK CHANNEL C+
11	GND	Ground	37	GND	Ground
12	RO0N	FIRST CHANNEL 0-	38	RE3N	SECOND CHANNEL 3-
13	RO0P	FIRST CHANNEL 0+	39	RE3P	SECOND CHANNEL 3+
14	RO1N	FIRST CHANNEL 1-	38	RE4N	SECOND CHANNEL 4-
15	RO1P	FIRST CHANNEL 1+	39	RE4P	SECOND CHANNEL 4+
16	RO2N	FIRST CHANNEL 2-	42	GND	Ground
17	RO2N	FIRST CHANNEL 2+	43	GND	Ground
18	GND	Ground	44	GND	Ground (NSB)
19	ROCLKN	FIRST CLOCK CHANNEL C-	45	GND	Ground
20	ROCLKP	FIRST CLOCK CHANNEL C+	46	GND	Ground
21	GND	Ground	47	NC	No connection
22	RO3N	FIRST CHANNEL 3-	48	VLCD	Power Supply +12.0V
23	RO3P	FIRST CHANNEL 3+	49	VLCD	Power Supply +12.0V
24	RO4N	FIRST CHANNEL 4-	50	VLCD	Power Supply +12.0V
25	RO4P	FIRST CHANNEL 4+	51	VLCD	Power Supply +12.0V
26	GND	Ground	-	-	-

- Note :
1. All GND(ground) pins should be connected together to the LCD module's metal frame.
 2. All V_{LCD} (power input) pins should be connected together.
 3. All Input levels of LVDS signals are based on the IEA 664 Standard.
 4. Specific pins(pin No. #2~#6) are used for internal data process of the LCD module.
If not used, these pins are no connection.
 5. Specific pins(pin No. #8~#9) are used for DCR test of the LCD module.
If not used, these pins are no connection.
 6. Specific pin No. #44 is used for for "No signal detection" of system signal interface.
It should be GND for NSB(No Signal Black) during the system interface signal is not.
If this pin is "H", LCD Module displays AGP(Auto Generation Pattern).

LC520WU*
Liquid Crystal Display

Product Specification

Table 6. Required signal assignment for Flat Link (Thine : THC63LVD823) Transmitter(Pin7="H")

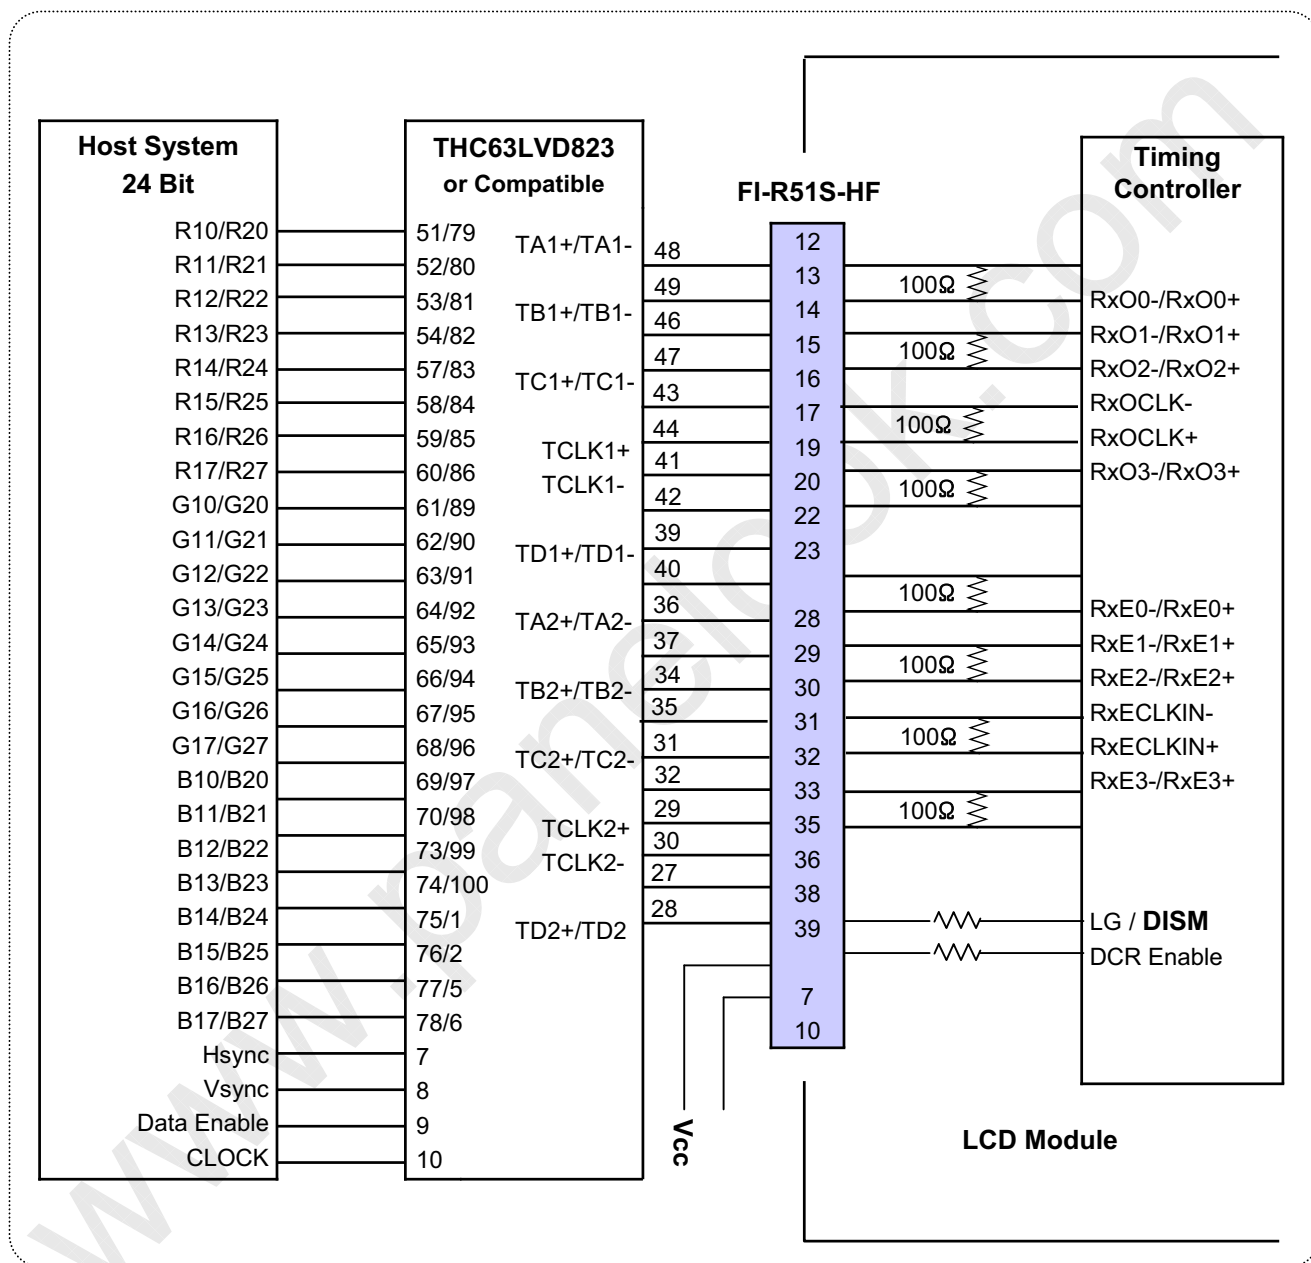

Note:

1. The LCD module uses a 100 Ohm(Ω) resistor between positive and negative lines of each receiver input.
2. Refer to LVDS transmitter data sheet for detail descriptions. (THC63LVD823 or Compatible)
3. '7' means MSB and '0' means LSB at R,G,B pixel data.



LC520WU*
Liquid Crystal Display

Product Specification

3-2-2. Backlight Inverter

The inverter connector is S14B-PH-SMC-TB top entry type (manufactured by JST) or equivalent
The pin configuration for the 14 pin connector is shown in the table below.

Table 5. INVERTER CONNECTOR PIN CONFIGURATION

Pin	Symbol	Signal assignment		Note
		Master(CN2)	Slave(CN3)	
1	VBL	24V Power Input	24V Power Input	
2	VBL	24V Power Input	24V Power Input	
3	VBL	24V Power Input	24V Power Input	
4	VBL	24V Power Input	24V Power Input	
5	VBL	24V Power Input	24V Power Input	
6	GND	GROUND	GROUND	
7	GND	GROUND	GROUND	
8	GND	GROUND	GROUND	
9	GND	GROUND	GROUND	
10	GND	GROUND	GROUND	
11	V _{BR-A}	Analog dimming voltage to control current amplitude	Don't care	0V : 90% (min) 1.65V : 100% (Typ) 3.3V : 110% (max) Open(NC) : 1.65V
12	V _{ON/OFF}	Backlight ON/OFF control	Don't care	ON : 2.5 ~ 5.0V OFF : 0.0 ~ 0.8V
13	V _{BR-B}	Burst dimming Voltage to control PWM duty	No Pin	0V : 20% (min) 3.3V : 100% (max)
14	Status	Using Status output	No pin	Upper 3.0V output (Normal), Under 0.7V output (Abnormal)


1. Connector

- 1) Connector(Receptacle)
: S14B-PH-SMC-TB (JST) &
S12B-PH-SMC-TB (JST)
- 2) Mating Connector(Plug)
: PHR14 (JST) &
PHR12 (JST)

* JST : Japan solderless Terminal Co.,Ltd.

<Master>

<Slave>

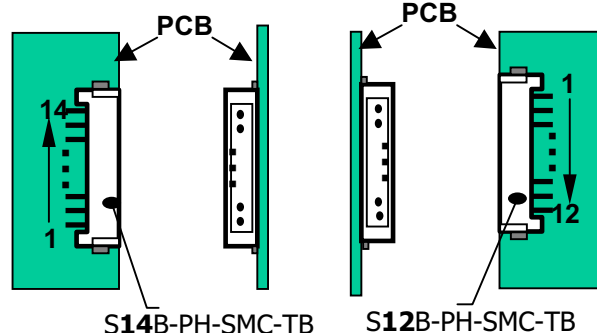



LC520WU*
Liquid Crystal Display

Product Specification

3-3. Signal Timing Specifications

Table 8 shows the signal timing required at the input of the LVDS transmitter. All of the interface signal timing should be satisfied with the following specification for normal operation.

Table 8. TIMING TABLE for NTSC (DE Only Mode)

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Period	tCLK	12.99	13.47	14.29	ns	
	Frequency	-	70	74.25	77	MHz	=148.5/2
Hsync	Period	tHP	1060	1100	1280	tCLK	1
	Horizontal Valid	tHV	-	960	-	tCLK	
	Horizontal Blank	tHB	100	140	320		
	Frequency	fH	65.5	67.5	68.9	KHz	
	Width	tWH	12	30	60	tCLK	
	Horizontal Back Porch	tHBP	12	78	120		
	Horizontal Front Porch	tHFP	12	32	120		
Vsync	Period	tVP	1091	1125	1149	tHP	1
	Vertical Valid	tVV	-	1080	-	tHP	
	Vertical Blank	tVB	12	45	68	tHP	
	Frequency	fV	57	60	63	Hz	
	Width	tWV	4	5	10	tHP	
	Vertical Back Porch	tVBP	6	36	48		
	Vertical Front Porch	tVFP	2	4	10		

Note : 1. $t_{HB} = t_{HFP} + t_{WH} + t_{HBP}$

$t_{VB} = t_{VFP} + t_{WV} + t_{VBP}$

The Input of HSYNC & VSYNC signal does not have an effect on normal operation(DE Only Mode).

The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate.

LC520WU*
Liquid Crystal Display

Product Specification

Table 9 shows the signal timing required at the input of the LVDS transmitter. All of the interface signal timing should be satisfied with the following specification for normal operation.

Table 9. TIMING TABLE for PAL (DE Only Mode)

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Period	tCLK	14.81	16.16	16.77	ns	
	Frequency	-	59.63	61.88	67.5	MHz	=123.75/2
Hsync	Period	tHP	1060	1100	1200	tCLK	1
	Horizontal Valid	tHV	-	960	-	tCLK	
	Horizontal Blank	tHB	100	140	240		
	Frequency	fH	55.25	56.25	57.25	KHz	
	Width	tWH	12	30	60	tCLK	
	Horizontal Back Porch	tHBP	12	78	120		
	Horizontal Front Porch	tHFP	12	32	120		
Vsync	Period	tVP	1105	1125	1145	tHP	1
	Vertical Valid	tVV	-	1080	-	tHP	
	Vertical Blank	tVB	25	45	65	tHP	
	Frequency	fV	47	50	53	Hz	
	Width	tWV	4	5	10	tHP	
	Vertical Back Porch	tVBP	6	36	45		
	Vertical Front Porch	tVFP	2	4	10		

Note : 1. $t_{HB} = t_{HFP} + t_{WH} + t_{HBP}$

$t_{VB} = t_{VFP} + t_{WV} + t_{VBP}$

The Input of HSYNC & VSYNC signal does not have an effect on normal operation(DE Only Mode).


The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate.



LC520WU*
Liquid Crystal Display

Product Specification

3-4. Signal Timing Waveforms

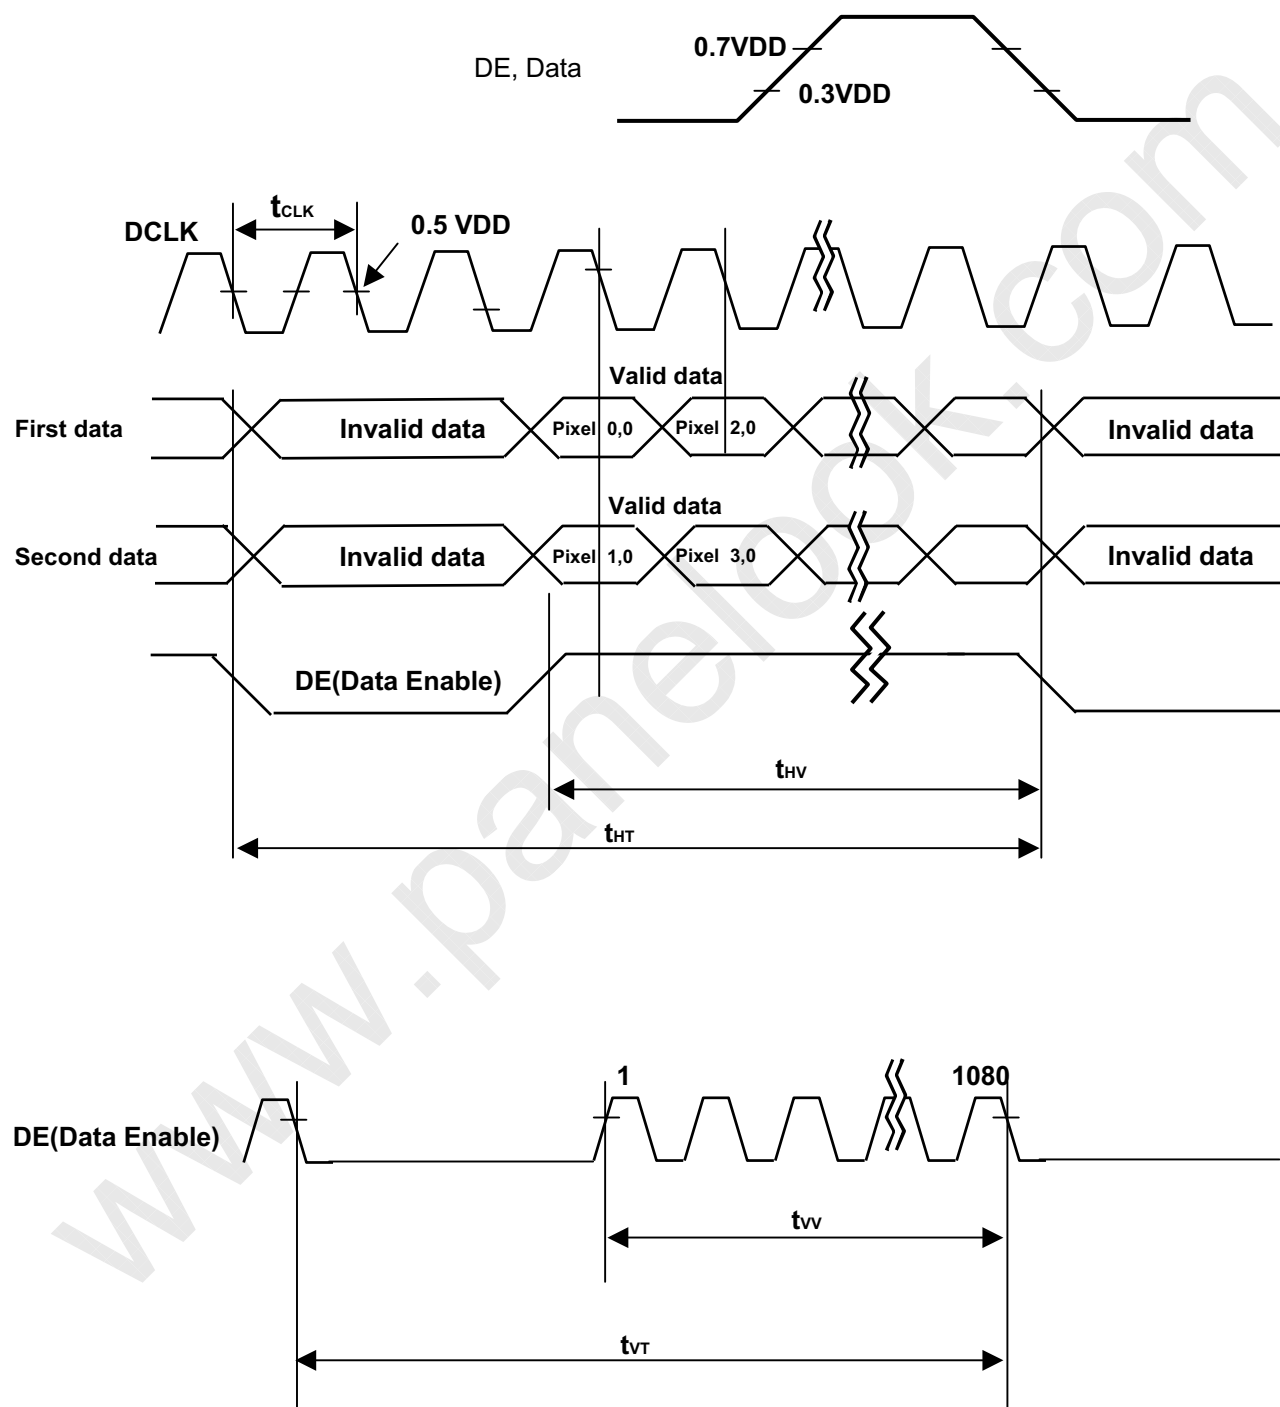



LC520WU*
Liquid Crystal Display

Product Specification

3-5. Color Data Reference

The brightness of each primary color(red,green,blue) is based on the 10-bit gray scale data input for the color. The higher binary input, the brighter the color. Table 8 provides a reference for color versus data input. 8-bit operation should be supplied 8-digit data of MSB.

Table 8. COLOR DATA REFERENCE

Color		Input Color Data																													
		RED										GREEN										BLUE									
		MSB					LSB					MSB					LSB					MSB					LSB				
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (0000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (0001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...																														
	RED (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (0000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (0001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...																														
	GREEN (1022)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
	GREEN (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
BLUE	BLUE (0000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (0001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...																														
	BLUE (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0
	BLUE (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1



LC520WU*
Liquid Crystal Display

Product Specification

3-6. Power Sequence

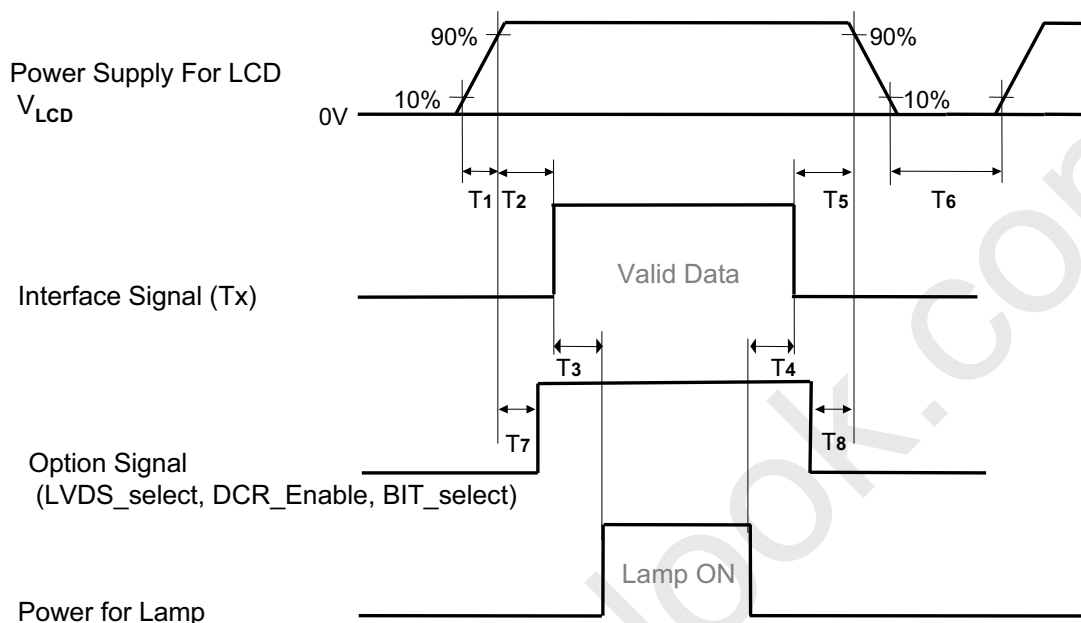


Table 9. POWER SEQUENCE

Parameter	Value			Unit
	Min	Typ	Max	
T1	1.0	-	20	ms
T2	0.5	-	25	ms
T3	200	-	-	ms
T4	200	-	-	ms
T5	0.5	-	25	ms
T6	1.0	-	-	s
T7	0 < T8 < T2			ms
T8	0 < T9 < T5			ms


- Note :
1. Please avoid floating state of interface signal at invalid period.
 2. When the interface signal is invalid, be sure to pull down the power supply V_{LCD} to 0V.
 3. The case when the T2/T5 exceed maximum specification, it operates protection pattern(Black pattern) till valid signal inputted. There is no reliability problem.
 4. The T3/T4 is recommended value, the case when failed to meet a minimum specification, abnormal display would be shown. There is no reliability problem.
 5. If the on time of option signal(DISM or DCR_Enable) precedes the on time of Power(V_{LCD}), check the LCD logic Power(V_{cc}) is under 0.8V, otherwise it will be happened abnormal display.
 6. T6 should be measured after the Module has been fully discharged between power off and on period



LC520WU*
Liquid Crystal Display

Product Specification

3-6-2. Power Sequence for Inverter

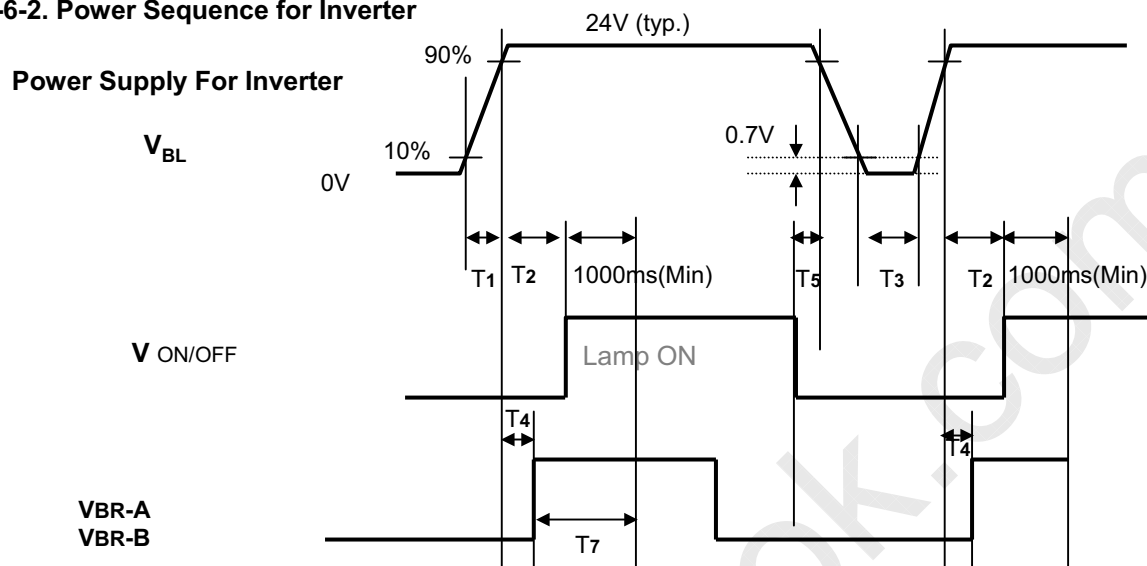

V_{BR-B} : V_{BR-B} has the same sequence with V_{BR-A} .

3-6-3. Deep condition for Inverter

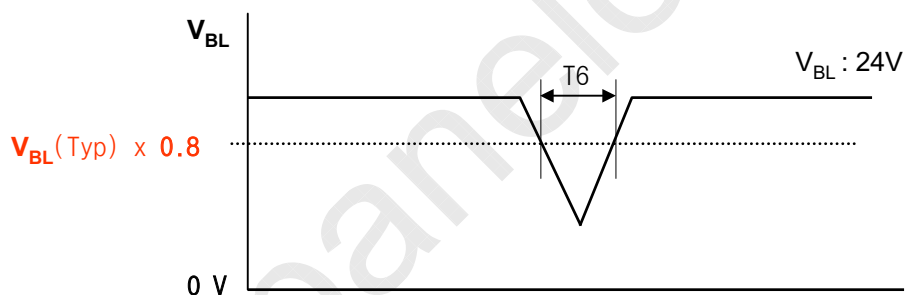


Table 10. Power Sequence for Inverter

Parameter	Values			Units	Remarks
	Min	Typ	Max		
T1	20	-	-	ms	1
T2	500	-	-	ms	2
T3	200	-	-	ms	
T4	0	-	-	ms	3
T5	10	-	-	ms	
T6	-	-	10	ms	$V_{BL}(Typ) \times 0.8$
T7	1000	-	-	ms	4

Note : 1. T1 describes rising time of 0V to 24V and is not applied at restarting time.

2. When V_{BL} (24V) is supplied always, there is no reliability problem.

3. T4(max) is less than T2.

4. In T7 section, V_{br-B} should be max level(3.3V) in T4 section and V_{br-A} recommend 1.65V.



LC520WU*
Liquid Crystal Display

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' for 30min in a dark environment at $25 \pm 2^\circ\text{C}$. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0° .

It is presented additional information concerning the measurement equipment and method in FIG. 1.

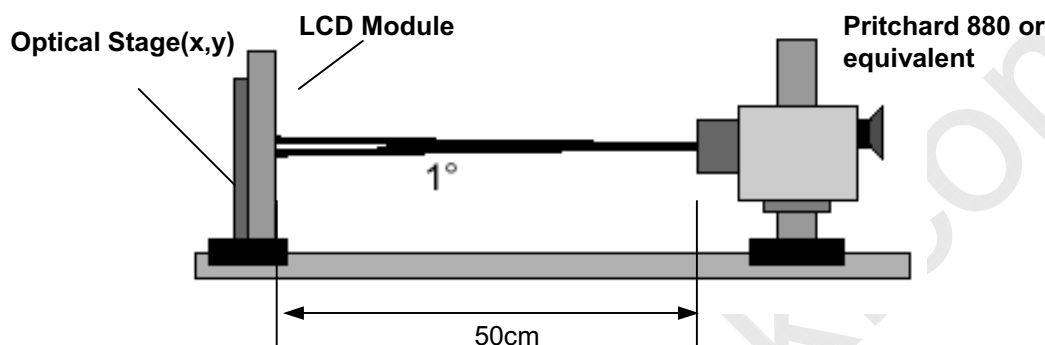


FIG. 1 Optical Characteristic Measurement Equipment and Method

Table 11. OPTICAL CHARACTERISTICS

$T_a = 25 \pm 2^\circ\text{C}$, $V_{\text{LCD}} = 12.0\text{V}$, $f_v = 120\text{Hz}$, $D_{\text{clk}} = 72\text{MHz}$, $V_{\text{BR}_B} = 3.3\text{V}$, $V_{\text{BR}_A} = 3.3\text{V}$

Parameter		Symbol	Value			Unit	Note
			Min	Typ	Max		
Contrast Ratio		CR	700	1,000	-		1
		DCR	3500	5,000	-		
Surface Luminance, white		L_{WH}	400	500	-	cd/m ²	2
Luminance Variation		δ_{WHITE} 5P	-	-	1.3		3
Response Time	G to G	-	-	5	10	ms	4
Color Coordinates [CIE1931]	RED	Rx	Typ -0.03	TBD	Typ +0.03		
		Ry		TBD			
	GREEN	Gx		TBD			
		Gy		TBD			
	BLUE	Bx		TBD			
		By		TBD			
	WHITE	Wx		0.279			
		Wy		0.292			
Viewing Angle (CR>10)							
	x axis, right($\phi=0^\circ$)	θ_r	85	89	-	degree	5
	x axis, left ($\phi=180^\circ$)	θ_l	85	89	-		
	y axis, up ($\phi=90^\circ$)	θ_u	85	89	-		
	y axis, down ($\phi=270^\circ$)	θ_d	85	89	-		
Gray Scale							6



LC520WU*
Liquid Crystal Display

Product Specification

Notes 1. Contrast Ratio(CR) is defined mathematically as :

CR (Contrast Ratio) = Maximum CR_n (n=1, 2, 3, 4, 5)

DCR (Dynamic CR) = Maximum CR_n (n=1, 2, 3, 4, 5)

$$CR_n = \frac{\text{Surface Luminance at position n with all white pixels}}{\text{Surface Luminance at position n with all black pixels}}$$

n = the Position number(1, 2, 3, 4, 5), For more information, see FIG 2.

- Surface luminance is luminance value at the center point across the LCD surface 50cm from the surface with all pixels displaying white.
For more information, see FIG 2.
- The variation in surface luminance, δ WHITE is defined as :

$$\delta \text{ WHITE}(5P) = \text{Maximum}(L_{on1}, L_{on2}, L_{on3}, \dots, L_{on5}) / \text{Minimum}(L_{on1}, L_{on2}, L_{on3}, \dots, L_{on5})$$
 Where L_{on1} to L_{on5} are the luminance with all pixels displaying white at 5 locations .
 For more information, see FIG 2.
- Response time is defined as the required time for the transition from G(N) to G(M) (Rise Time, Tr_R) and from G(M) to G(N) (Decay Time, Tr_D). For additional information see the FIG. 3. (N<M)
- Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information, see FIG 4.
- Gray scale specification
 Gamma Value is approximately 2.2.
 For more information, see Table 12.

Table 12. GRAY SCALE SPECIFICATION

Gray Level		Luminance [%] (Typ) [Normal]	Luminance [%] (Typ) [DCR, Vbr-a 1.65V]
8bit	10bit		
L0	L0	TBD	TBD
L15	L63	TBD	TBD
L31	L127	TBD	TBD
L47	L191	TBD	TBD
L63	L255	TBD	TBD
L79	L319	TBD	TBD
L95	L383	TBD	TBD
L111	L447	TBD	TBD
L127	L511	TBD	TBD
L143	L575	TBD	TBD
L159	L639	TBD	TBD
L175	L703	TBD	TBD
L191	L767	TBD	TBD
L207	L831	TBD	TBD
L223	L895	TBD	TBD
L239	L959	TBD	TBD
L255	L1023	TBD	TBD



LC520WU*
Liquid Crystal Display

Product Specification

Measuring point for surface luminance & measuring point for luminance variation

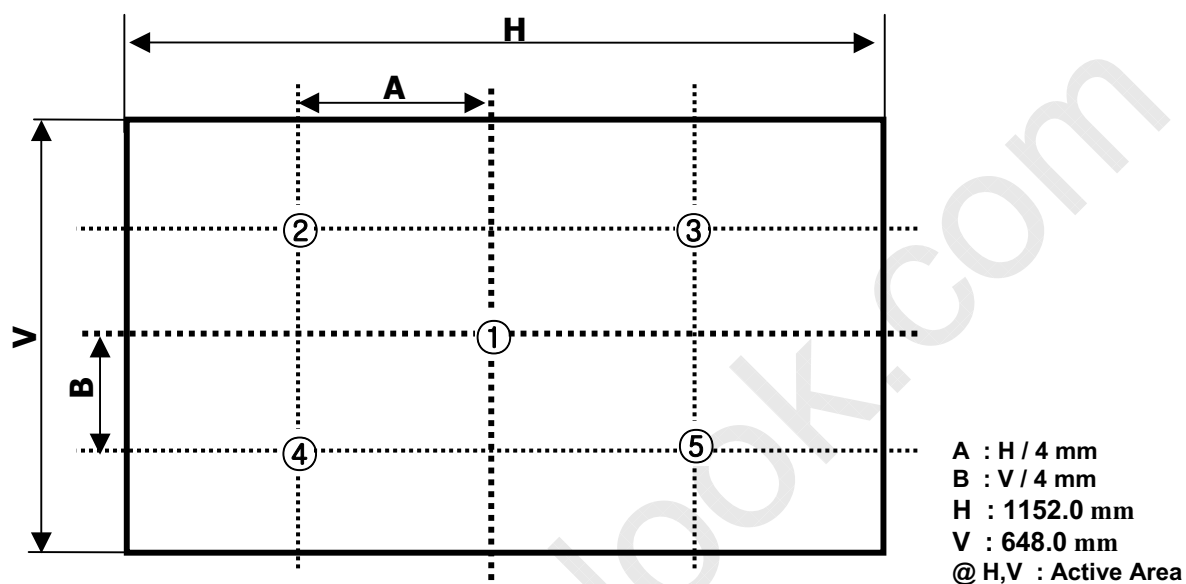


FIG. 2 Measure Point for Luminance

Response time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

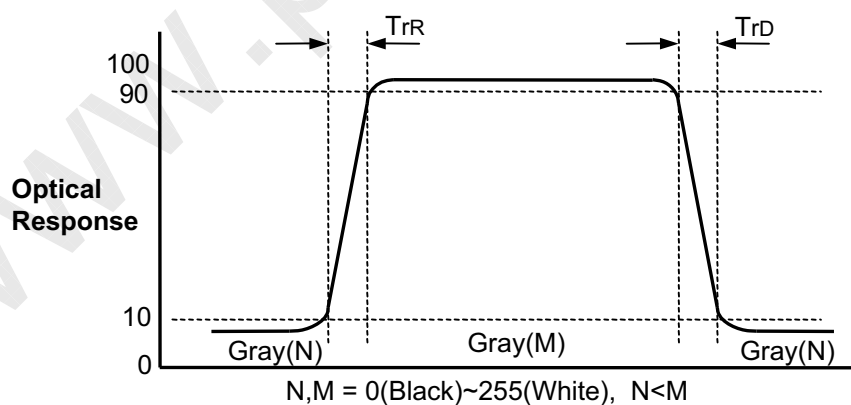


FIG. 3 Response Time



LC520WU*
Liquid Crystal Display

Product Specification

Dimension of viewing angle range

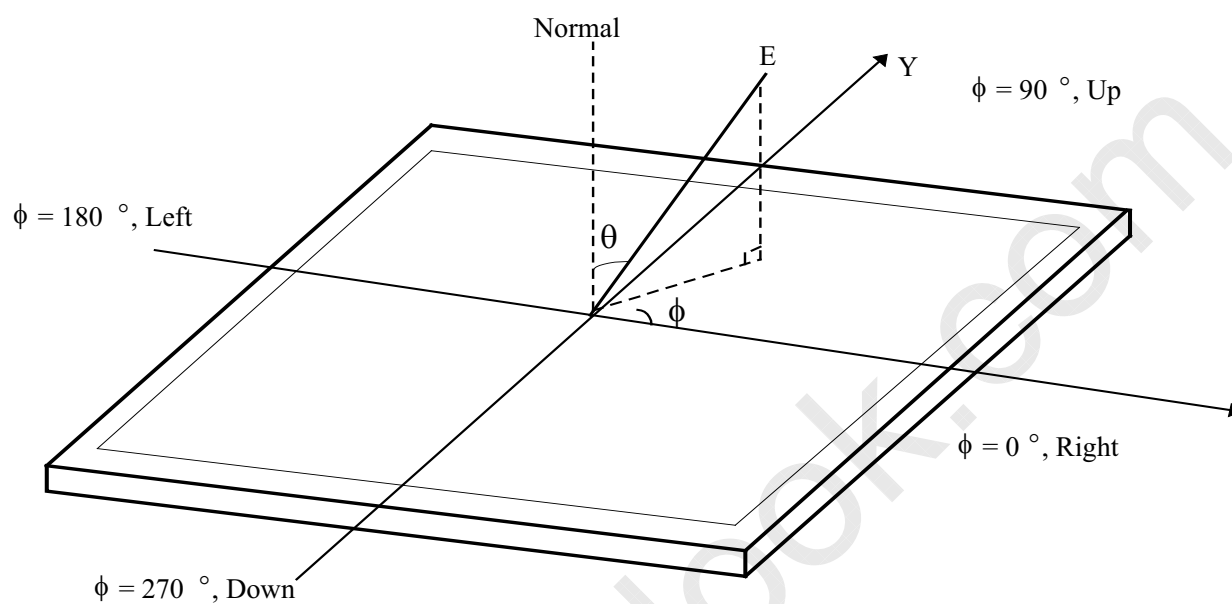


FIG. 4 Viewing angle

LC520WU*
Liquid Crystal Display

Product Specification

5. Mechanical Characteristics

The following items provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD module.

Table 13. MECHANICAL CHARACTERISTICS

Outline Dimension	Horizontal	1236.0 mm
	Vertical	719.2 mm
	Depth	57.5 mm
Bezel Area	Horizontal	1160.0 mm
	Vertical	656.0 mm
Active Display Area	Horizontal	1152.0 mm
	Vertical	648.0 mm
Weight	TBD	
Surface Treatment	Hard coating(3H) Anti-glare treatment of the front polarizer (Haze 13%)	


Note : Please refer to a mechanic drawing in terms of tolerance at the next page.



LC520WU*
Liquid Crystal Display

Product Specification

<FRONT VIEW>

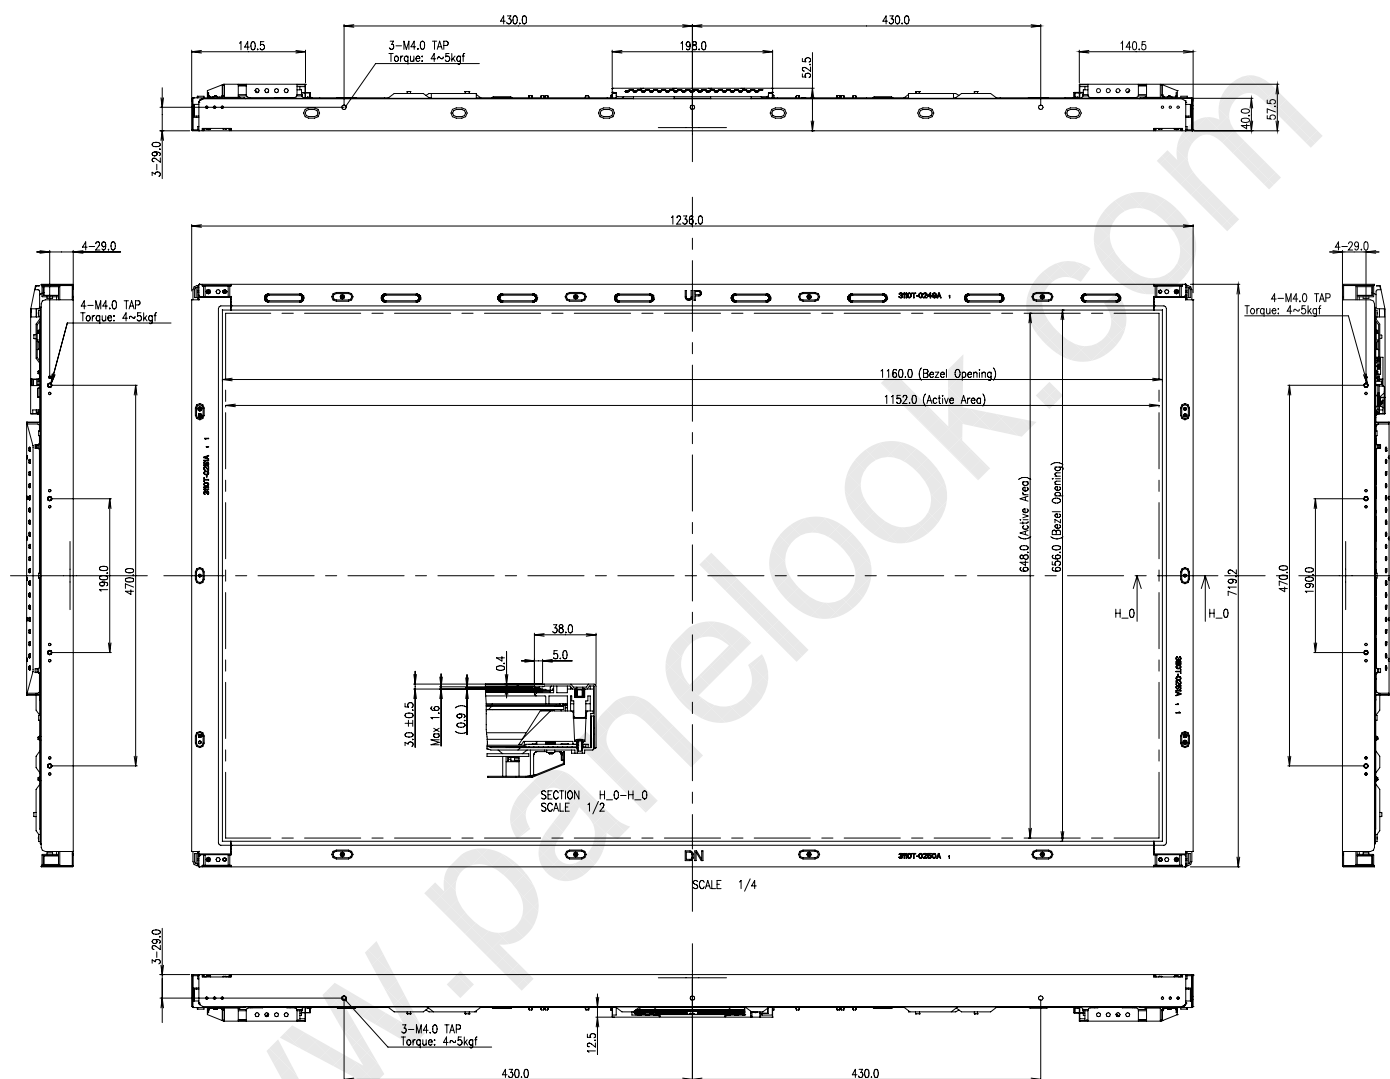




LC520WU*
Liquid Crystal Display


Product Specification

<REAR VIEW>

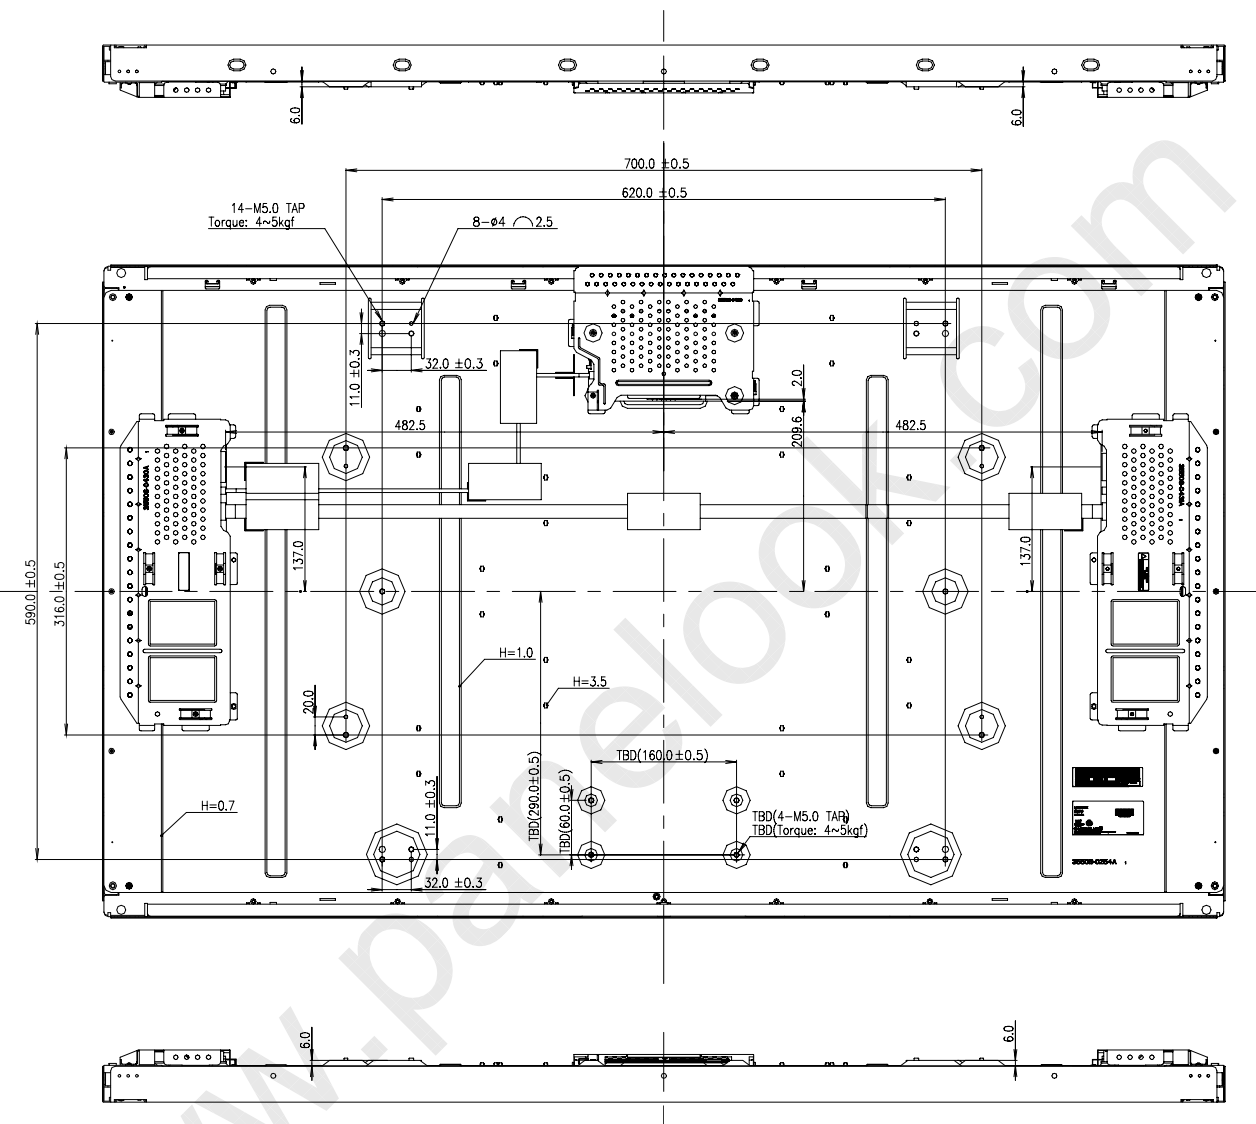

NOTES

1. Unspecified tolerances are to be $\pm 1.0\text{mm}$.
2. The length of mounting screw is MAX 5.5mm.
3. TBI and parallel disposition tolerance of display area are as following:
(1) X-Direction : $M-BI \leq 1.5\text{mm}$
(2) Y-Direction : $KC-DI \leq 1.5\text{mm}$



4. This part should be contains Eco-hazardous substances (Pb, Cd, Hg, Cr6+, PBB, PBDE, etc.) within standard level of LG.Philips LCD. Details should be followed Green Procurement standard(B-8022). Especially, Part should be followed and controlled the following specifications.
(1) Eco-hazardous substances test report should be submitted when Part certification test and First Mass Production.
(2) Don't flow Eco-hazardous substances into resin by using scrap.
(3) Don't flow Eco-hazardous substances into metal by using impurities or improper stuff.

Ver. 0.0

Nov.10, 2006

23 / 32

LC520WU*
Liquid Crystal Display

Product Specification

6. Reliability

Table 14. ENVIRONMENT TEST CONDITION

No.	Test Item	Condition
1	High temperature storage test	Ta= 50°C 240h
2	Low temperature storage test	Ta= -20°C 240h
3	High temperature operation test	Ta= 40°C 50%RH 240h
4	Low temperature operation test	Ta= 0°C 240h
5	Vibration test (operating)	Wave form : random Vibration level : 1.0G RMS Bandwidth : 10-300Hz Duration : X,Y,Z, 30 min One time each direction
6	Shock test (operating)	Shock level : 50G Waveform : half sine wave, 11ms Direction : $\pm X$, $\pm Y$, $\pm Z$ One time each direction
7	Humidity condition Operation	Ta= 40 °C, 90%RH
8	Altitude operating storage / shipment	0 - 14,000 feet(4267.2m) 0 - 40,000 feet(12192m)



LC520WU*
Liquid Crystal Display

Product Specification

7. International standards

7-1. Safety

- a) UL 60065, 7th Edition, dated June 30, 2003, Underwriters Laboratories, Inc., Standard for Audio, Video and Similar Electronic Apparatus.
- b) CAN/CSA C22.2, No. 60065:03, Canadian Standards Association, Standard for Audio, Video and Similar Electronic Apparatus.
- c) IEC60065:2001, 7th Edition CB-scheme and EN 60065:2002, Safety requirements for Audio, Video and Similar Electronic Apparatus..

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz." American National Standards Institute(ANSI), 1992
- b) CISPR22 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)

LC520WU*
Liquid Crystal Display

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

G ~ M : SERIAL NO.

D : YEAR

F : FACTORY CODE

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

3. FACTORY CODE

Factory Code	Gumi	Nanjing	Paju
Mark	K	C	P

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.

This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one Pallet : 10 pcs

b) Pallet Size : 1350mm x 1150mm x 945mm



LC520WU*
Liquid Crystal Display

Product Specification

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (7) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (8) A screw which is fastened up the steels should be a machine screw.
(if not, it causes metallic foreign material and deal LCM a fatal blow)
- (9) Please do not set LCD on its edge.



LC520WU*
Liquid Crystal Display

Product Specification

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. Handling Precautions for Protection Film


- (1) The protection film is attached to the bezel with a small masking tape.
When the protection film is peeled off, static electricity is generated between the film and polarizer.
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



LC520WU*
Liquid Crystal Display

APPENDIX- III

■ LC520WU*-SL** Packing Ass'y

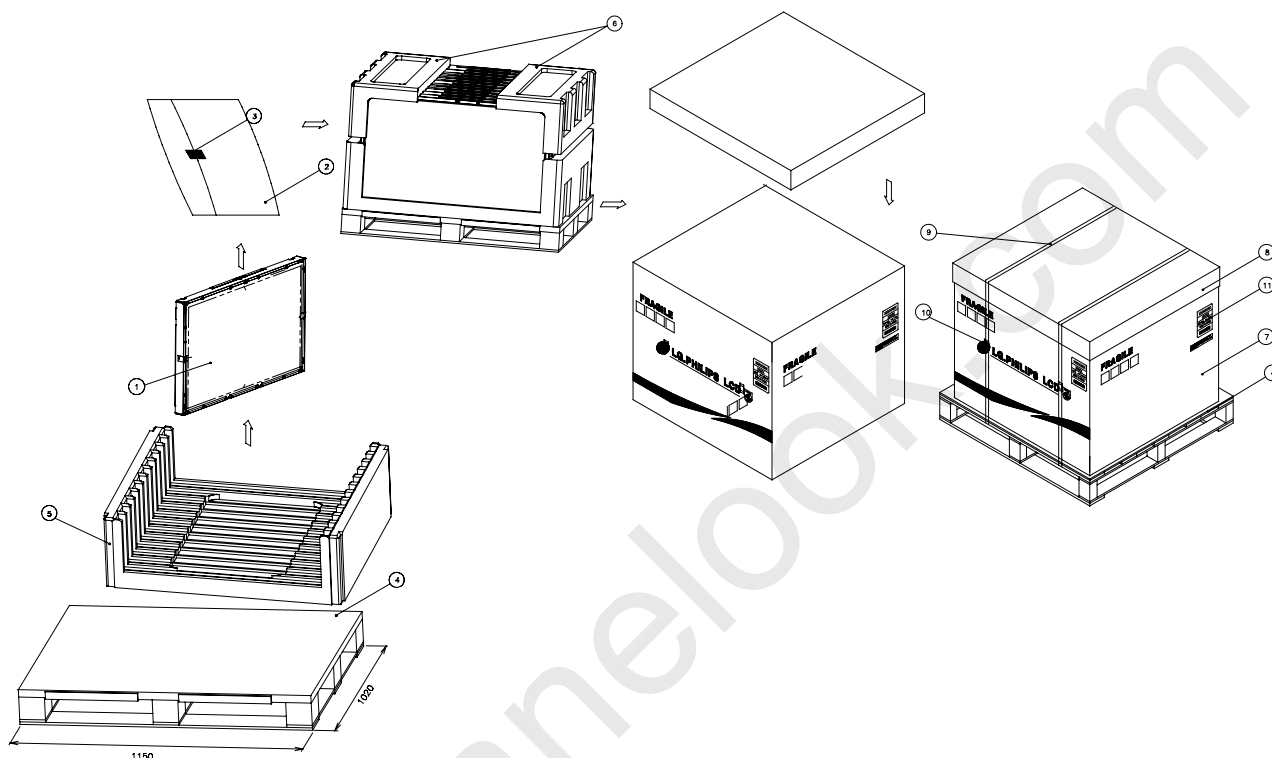


NO.	DESCRIPTION	MATERIAL
1	LCD Module	
2	BAG	
3	TAPE	
4	PALLET	
5	PACKING	
6	PACKING	
7	ANGLE PACKING	
8	PAPER ANGLE	
9	BAND	
10	LABEL	




LC520WU*
Liquid Crystal Display

APPENDIX- IV

■ LCM Label

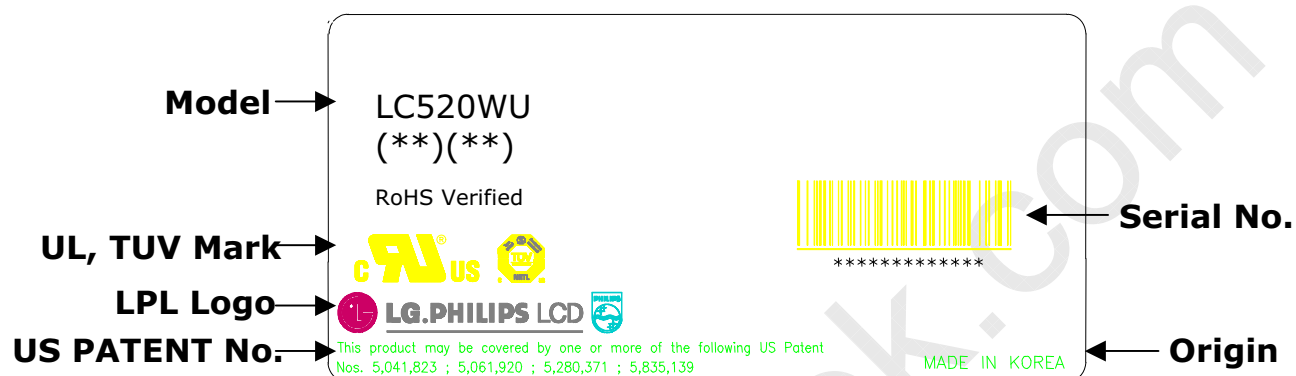


■ Serial No. (See CAS 25page for more information)

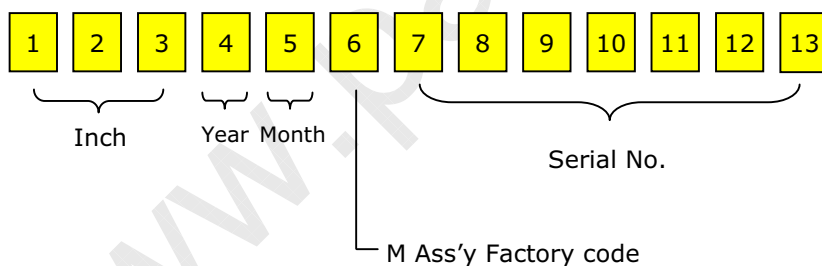

LC520WU*
Liquid Crystal Display

APPENDIX- V

■ Pallet Label

LC520WU*	
SL**	
10 PCS	001/01-01
REMARK	
MADE IN KOREA	RoHS Verified
 *****	